


ACSF-346-FL

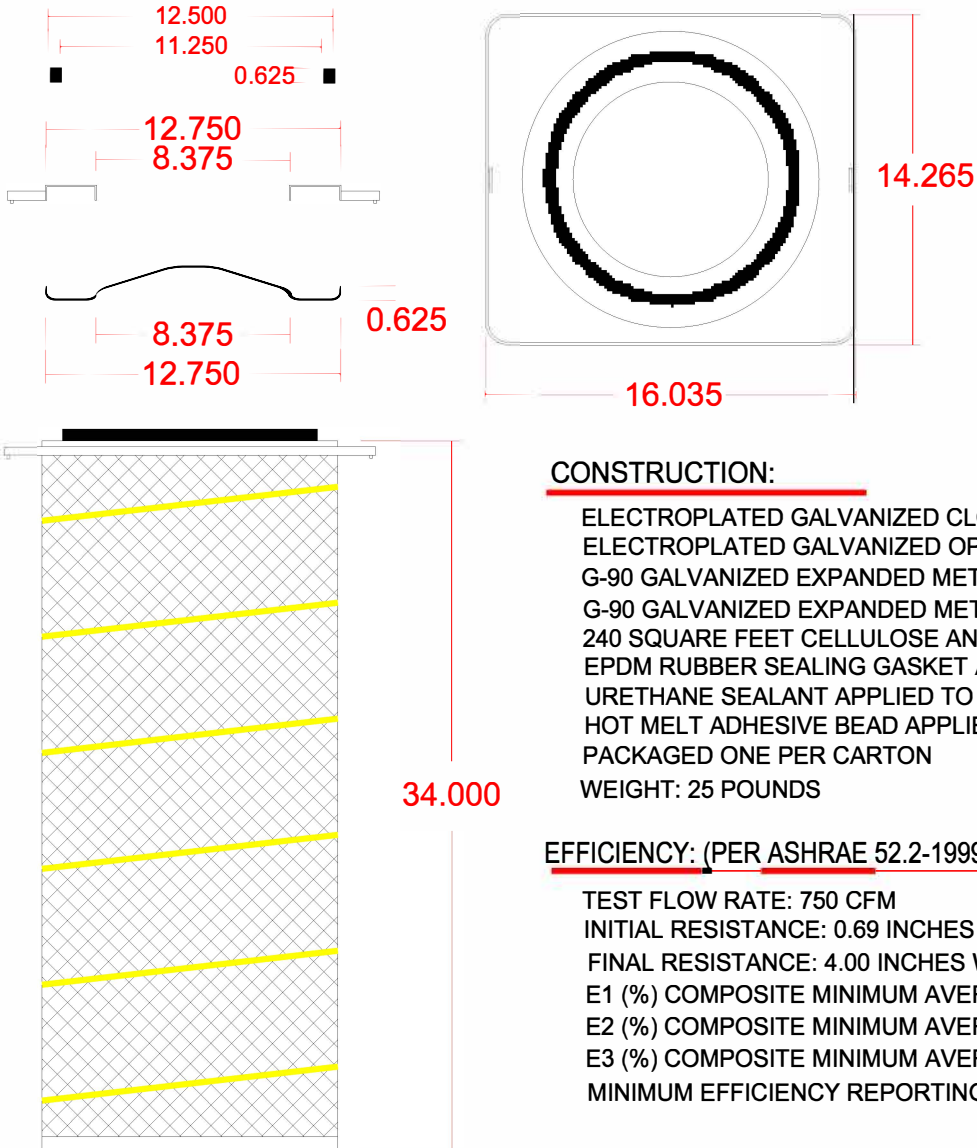

CONSTRUCTION:

ELECTROPLATED GALVANIZED CLOSED END CAP
 ELECTROPLATED GALVANIZED OPEN END CAP w/FARR STYLE FLANGE
 G-90 GALVANIZED EXPANDED METAL OUTER BODY
 G-90 GALVANIZED EXPANDED METAL INNER CORE
 240 SQUARE FEET CELLULOSE AND POLYESTER BLENDED MEDIA
 EPDM RUBBER SEALING GASKET APPLIED TO ONE OPEN END CAP
 URETHANE SEALANT APPLIED TO BOTH ENDS
 HOT MELT ADHESIVE BEAD APPLIED OUTSIDE ONLY
 PACKAGED ONE PER CARTON
 WEIGHT: 25 POUNDS

EFFICIENCY: (PER ASHRAE 52.2-1999)

TEST FLOW RATE: 750 CFM
 INITIAL RESISTANCE: 0.69 INCHES W.G.
 FINAL RESISTANCE: 4.00 INCHES W.G.
 E1 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 0.30 - 1.00 MICRON: <20%
 E2 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 1.0 - 3.0 MICRON: <65%
 E3 (%) COMPOSITE MINIMUM AVERAGE EFFICIENCY 3.0 - 10.0 MICRON: <85%
 MINIMUM EFFICIENCY REPORTING VALUE: MERV 11 @ 750 CFM